

# EGV-BOX


## Parts list and tricks

### Parts list.


Quantity	Part
1	Galvanized iron base
1	Cover "U" shaped aluminum
1	PCB couple panels (front and rear)
2	Stereo female panel 3.5 mm
1	BCN female panel
1	Power supply female panel
1	Large knob
2	Small knobs
8	Self-tapping screws
2	Washers for Polyvaricon
4	pairs of female pins
45 cm	3 pieces of wire colors
5 cm	RG-174 coax cable



## Power supply female jack

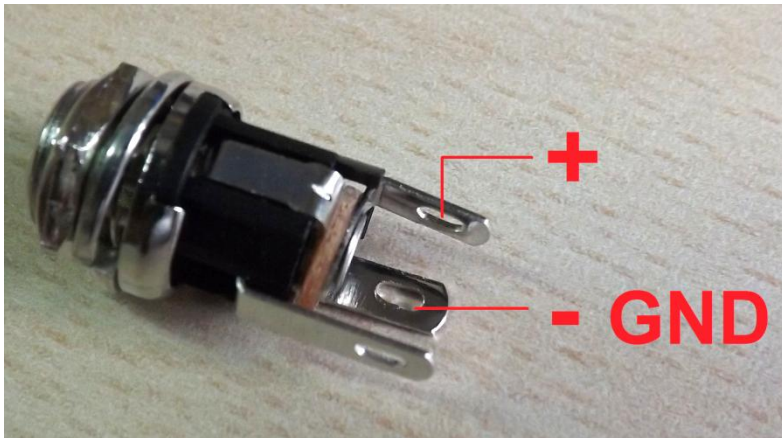

## Stereo jacks

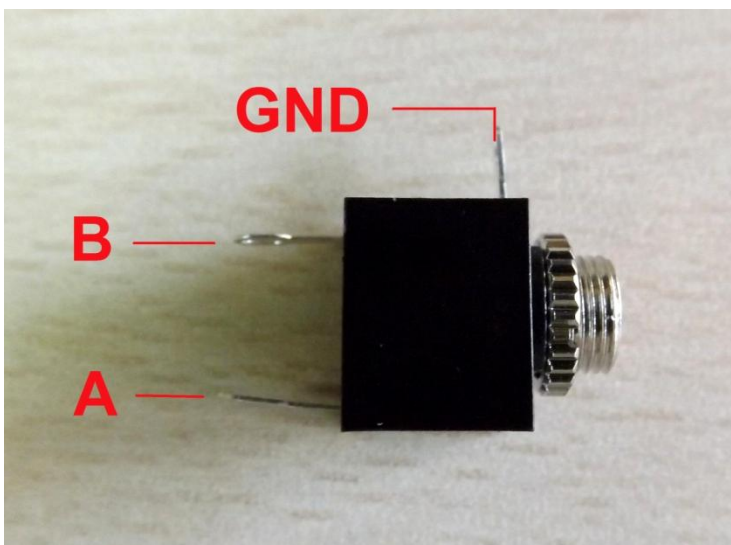

**See the drawing of the wiring in the EGV-40 manual.**

You can make the wiring as you like. However, please note the following details.

**Pay attention to the polarity of all connections.** You must connect both the positive and negative wires (GND).

**Jacks.** All jacks are stereo, but you should meet your needs.

If you use headphones, you must join the two contacts (A+B) of the panel female jack (to sound the two channels).

For the "key" jack, you can use the tip of the jack (A) and GND.

**Potentiometers.** Reverse the wiring terminals of the potentiometers so that they take action in the right direction (see image).

Note that you must twist the terminals do not touch the top of the box.

**Polyvaricon.** Set the J1 jumper in the "B" position to select the appropriate section Polyvaricon (see EGV-40 manual).

Put two washers included in the kit with the screws of Polyvaricon.

**You should do strength with screws to thread the first time.** Use a good screwdriver. It is very easy. Be careful not to scratch the printed panels

**You can spray paint the aluminum cover** of the box as you like.

Personalize the box with the color you like.

